




## 2E Wireless keyboard KS 240 Gray


### Manual

#### Function overview of the keyboard

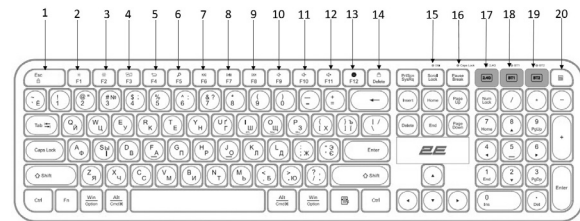


1	Change FN in default	8	Play/Pause	15	Battery indicator
2	Screen brightness -	9	Next track	16	Caps Lock indicator
3	Screen brightness +	10	Mute	17	2.4G mode button
4	Multiscreen display	11	Volume-	18	1 Bluetooth mode
5	Back	12	Volume+	19	2 Bluetooth mode
6	Find	13	Change language input	20	Calculator
7	Previous track	14	Lock in		

#### 2.4G wireless connection guide

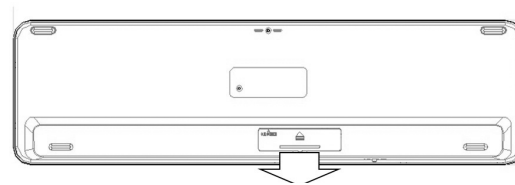


1. Take out receiver and close the battery door
2. Plug the receiver into the USB port of a PC

**Note:** The factory default setting of the connection mode of keyboard is 2.4G mode.

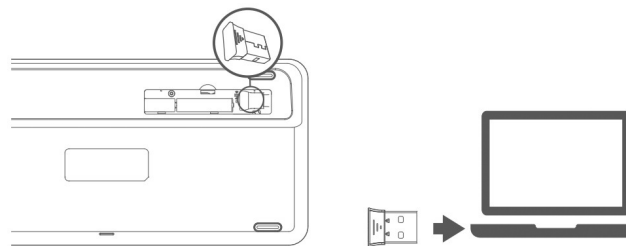

#### Keyboard Bluetooth connection guide

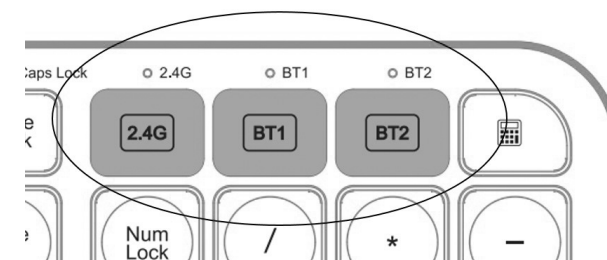


**Note:** Make sure that the keyboard power is on before Bluetooth pairing.

1. Select the Bluetooth mode to be connected, short press the mode key, and the corresponding indicator on the top will flash slowly
2. Long press the Bluetooth mode switch key again, and the corresponding indicator on the top will flash quickly, and then enter the waiting for Bluetooth pairing.
3. Turn on the Bluetooth of your computer or other devices, search and select «BT3.0 KB» or «BT5.0 KB» and start Bluetooth pairing until the connection is completed.

**Note:** Bluetooth 5.0 is not supported on Windows 7 and below; The device ID for Bluetooth 3.0 – «BT3.0 KB» while for 5.0 - «BT5.0 KB»

#### Mode switching method of the keyboard

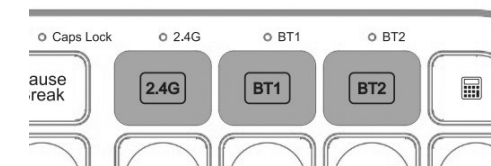

1. The keyboard has three channels: 2.4G, Bluetooth 1 and Bluetooth 2, which can connected **three devices at the same time.**
2. Mode switching. Short press the mode switch button, the corresponding mode indicator on the top will be ON for 3 seconds and then it will be off. The switch to the corresponding equipment is completed. If the mode indicator is flashing slowly, it means that the mode has been connect.

#### iOS/Mac/Win layout switch

Press and hold for 3 seconds to switch the system layout

**Note:** default settings is Windows layout.




#### F1-F12/ multimedia function switch

1. The factory default setting of F1-F12/multimedia function keys is multimedia function.



2. Press this key combination and switch to F1-F12 function. Press it again to switch back to multimedia function.

**Note:** multimedia functions are partly invalid in different OS versions



#### Sleep Mode

1. When the keyboard stops working for 30 minutes, it will automatically enter the sleep mode and the indicator light will go out.
2. If you want to use the keyboard again, you only need to press any key and the keyboard will wake up within 3 seconds.
3. The indicator light lights up again and starts to work.

#### Technical specifications

1. Connectivity: 2.4G/ Bluetooth 3.0/ Bluetooth 5.0
2. Working distance: 2.4G about 15 m/ Bluetooth about 10m
3. Keyboard keys lifespan: 10 million keystrokes
4. Power: 1 x AAA
5. Keyboard size: 314 x 145x 24 mm
6. Product weight: 797 g

#### Trouble shooting

1. Make sure that the USB wireless receiver of the product plugged correctly into the USB port of the computer.
2. Make sure the computer meets the minimum system requirement.
3. If the distance between the product and the receiver exceeds an effective range, please reduce the distance for better performance.

#### Attention!

1. Please use dry and soft cloth to clean the product.
2. Do not disassemble the product by force.
3. Do not get in the rain of in the sun or fire.
4. Do not flush directly with water.